



# FEHR LAW FIRM

Suite 703  
The Aerospace Center  
1104 Country Hills Drive  
Ogden, Utah 84403

A

Thompson E. Fehr

(801) 393-6292

Admitted in California,  
Utah, and Wisconsin

Registered Patent Attorney



October 14, 1999

Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Re: Patent Application for  
Electrostatic Fluid Accelerator  
Our File No. PFUHRI

Dear Commissioner:

I have enclosed for appropriate attention the above-referenced Patent Application as well as the applicable filing fee of \$ 683<sup>00</sup>.

Thank you for handling this matter.

Very truly yours,

*Thompson E. Fehr*  
Thompson E. Fehr  
Reg. No. 31353

TEF/msg

Enclosure

09/14/99 10:14:59

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Igor A. Krichtafovitch and Robert L. Fuhriman, Jr.

Serial No.:

Filed:

For: Electrostatic Fluid Accelerator

Group Art Unit:

Examiner:

Attorney Docket No.: PFUHRI

Commissioner of Patents and Trademarks  
Washington, D.C. 20231

EXPRESS MAIL CERTIFICATE

Express Mail Label No. EJ792102413US

Date of Deposit: 10.14.1999

I hereby certify that the following attached

Application of Igor A. Krichtafovitch and Robert L. Fuhriman, Jr.  
for a patent on an Electrostatic Fluid Accelerator

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

*Ingrid L. Fuhriman*  
*VP President - High Voltage Integrator*

Express Mail Label No. EJ792102413US

**PATENT**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of: Igor A. Krichtafovitch and Robert L. Fuhriman, Jr.

Serial No.:

Filed:

For: Electrostatic Fluid Accelerator

Group Art Unit:

Examiner:

Attorney Docket No.: PFUHRI

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  
STATUS (37 CFR 1.9(f) AND 1.27(b))--INDEPENDENT INVENTOR**

As a below-named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled Electrostatic Fluid Accelerator described in the specification filed herewith.

I have not assigned, granted, conveyed, or licensed and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:


High Voltage Integrated  
13910 S. E. 23rd Street  
Bellevue, Washington 98005

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

VERIFIED STATEMENT (DECLARATION)  
CLAIMING SMALL ENTITY STATUS (37 CFR  
1.9(f) AND 1.27(b))--INDEPENDENT INVENTOR

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Robert L. Fuhrman, Jr.  
Inventor

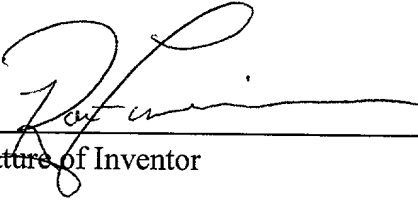

Signature of Inventor

Date: 10-14-99

09449720 104499

**PATENT**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of: Igor A. Krichtafovitch and Robert L. Fuhriman, Jr.

Serial No.:

Filed:

For: Electrostatic Fluid Accelerator

Group Art Unit:

Examiner:

Attorney Docket No.: PFUHRI

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  
STATUS (37 CFR 1.9(f) AND 1.27(b))--INDEPENDENT INVENTOR**

As a below-named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled Electrostatic Fluid Accelerator described in the specification filed herewith.

I have not assigned, granted, conveyed, or licensed and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

High Voltage Integrated  
13910 S. E. 23rd Street  
Bellevue, Washington 98005

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

VERIFIED STATEMENT (DECLARATION)  
CLAIMING SMALL ENTITY STATUS (37 CFR  
1.9(f) AND 1.27(b))--INDEPENDENT INVENTOR

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Igor A. Krichtafovitch  
Inventor

Igor A. Krichtafovitch  
Signature of Inventor

Date: 10.14.1999

00449730-104499

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Igor A. Krichtafovitch and Robert L. Fuhriman, Jr.

Serial No.:

Filed:

For: Electrostatic Fluid Accelerator

Group Art Unit:

Examiner:

Attorney Docket No.: PFUHRI

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  
STATUS (37 CFR 1.9(f) AND 1.27(c))--SMALL BUSINESS CONCERN

I hereby declare that I am an official of the small business concern empowered to act on behalf of the concern identified below:

High Voltage Integrated  
13910 S. E. 23rd Street  
Bellevue, Washington 98005

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.1301-1305, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third-party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to, and remain with, the small business concern identified above with regard to the invention entitled Electrostatic Fluid Accelerator by inventors Igor A. Krichtafovitch and Robert L. Fuhriman, Jr. described in the specification filed herewith.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention is listed below; and no rights

VERIFIED STATEMENT (DECLARATION)  
CLAIMING SMALL ENTITY STATUS (37 CFR  
1.9(f) AND 1.27(c))--SMALL BUSINESS CONCERN

to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

\_\_\_\_ INDIVIDUAL      X SMALL BUSINESS CONCERN

\_\_\_\_ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small business entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Ingrid T. Fuhrman

TITLE OF PERSON OTHER THAN OWNER: VICE PRESIDENT

ADDRESS OF PERSON SIGNING: 13910 SE 23<sup>rd</sup> St  
Belleuve, WA 98005

SIGNATURE Ingrid T. Fuhrman Date: 10-14-44



1 October 14, 1999

2 Express Mail Label No.: EJ792102413US

PATENT

3

4

5

6

7

8

9

10 UNITED STATES PATENT APPLICATION

11

12 of

13

14 INVENTOR: IGOR A. KRICHTAFOVITCH

15 A Citizen of the Ukraine

16 822 233rd Street, S. E.

17 BOTHELL, WASHINGTON 98021

18 and

19 ROBERT L. FUHRIMAN, JR.

20 A Citizen of the United States

21 13910 S. E. 23rd Street

22 BELLEVUE, WASHINGTON 98005

23

24

25 for

26

27

28 ELECTROSTATIC FLUID ACCELERATOR

00449700-10499

**CROSS-REFERENCE TO RELATED APPLICATION**

This is a continuation of a copending U. S. provisional application serial no. 60/104,573,  
filed on 10/16/1998.

1 **BACKGROUND OF THE INVENTION**

2  
3 **FIELD OF THE INVENTION**

4 This invention relates to a device for accelerating, and thereby imparting velocity and  
5 momentum to a fluid, especially to air, through the use of ions and electrical fields.

6  
7 **DESCRIPTION OF THE RELATED ART**

8 A number of patents (*see, e.g.*, United States patent numbers 4,210,847 and 4,231,766)  
9 have recognized the fact that ions may be generated by an electrode (termed the “corona  
10 electrode”), attracted (and, therefore, accelerated) toward another electrode (termed the  
11 “attracting electrode”), and impart momentum, directed toward the attracting electrode, to  
12 surrounding air molecules through collisions with such molecules.

13 The corona electrode must either have a sharp edge or be small in size, such as a thin  
14 wire, in order to create a corona discharge and thereby produce in the surrounding air ions of the  
15 air molecules. Such ions have the same electrical polarity as does the corona electrode.

16 Any other configuration of corona electrodes and other electrodes where the potential  
17 differences between the electrodes are such that ion-generating corona discharge occurs at the  
18 corona electrodes may be used for ion generation and consequent fluid acceleration.

19 When the ions collide with other air molecules, not only do such ions impart momentum  
20 to such air molecules, but the ions also transfer some of their excess electric charge to these other  
21 air molecules, thereby creating additional molecules that are attracted toward the attracting  
22 electrode. These combined effects cause the so-called electric wind.

23 However, because a small number of ions are generated by the corona electrode in  
24 comparison to the number of air molecules which are in the vicinity of the corona electrode, the  
25 ions in the present electric wind generators must be given initial high velocities in order to move  
26 the surrounding air. To date, even these high initial ionic velocities have not produced  
27 significant speeds of air movement. And, even worse, such high ionic velocities cause such  
28 excitation of surrounding air molecules that substantial quantities of ozone and nitrogen oxides,  
29 all of which have well-known detrimental environmental effects, are produced.

1 Presently, no invention has even attained significant speeds of air movement, let alone  
2 doing so without generating undesirable quantities of ozone and nitrogen oxides.

3 Three patents, viz., United States patent numbers 3,638,058; 4,380,720; and 5,077,500,  
4 have, however, employed on a rudimentary level some of the techniques which have enabled the  
5 present inventors to achieve significant speeds of air movement and to do so without generating  
6 undesirable quantities of ozone and nitrogen oxides.

7 United States patent number 5,077,500, in order to ensure that all corona electrodes  
8 “work under mutually the same conditions and will thus all engender mutually the same corona  
9 discharge,” uses other electrodes to shield the corona electrodes from the walls of the duct (in  
10 which the device of that patent is to be installed) and from other corona electrodes. These other  
11 electrodes, according to lines 59 through 60 in column 3 of the patent, “. . . will not take up any  
12 corona current . . . .”

13 Also, United States patent number 4,380,720 employs multiple stages, each consisting of  
14 pairs of a corona electrode and an attracting electrode, so that the air molecules which have been  
15 accelerated to a given speed by one stage will be further accelerated to an even greater speed by  
16 the subsequent stage. United States patent number 4,380,720 does not, however, recognize the  
17 need to neutralize substantially all ions and other electrically charged particles, such as dust,  
18 prior to their approaching the corona electrode of the subsequent stage in order to avoid having  
19 such ions and particles repelled by that corona electrode in an upstream direction, *i.e.*, the  
20 direction opposite to the velocity produced by the attracting electrode of the previous stage.

21 And United States patent number 5,077,500, on lines 25 through 29 of column 1, states,  
22 “The air ions migrate rapidly from the corona electrode to the target electrode, under the  
23 influence of the electric field, and relinquish their electric charge to the target electrode and  
24 return to electrically neutral air molecules.” The fact that the target electrode is not, however, so  
25 effective as to neutralize substantially all of the air ions is apparent from the discussion of ion  
26 current between the corona electrode **K** and the surfaces **4**, which discussion is located on lines  
27 15 through 27 in column 4.

28 Similarly, United States patent number 3,638,058 provides, on line 66 of column 1  
29 through line 13 of column 2, “. . . it can be seen that with a high DC voltage impressed between

1 cathode point **12** and ring anode **18**, an electrostatic field will result causing a corona discharge  
2 region surrounding point **14**. This corona discharge region will ionize the air molecules in  
3 proximity to point **14** which, being charged particles of the same polarity as the cathode, will, in  
4 turn, be attracted toward ring anode **18** which will also act as a focusing anode. The accelerated  
5 ions will impart kinetic energy to neutral air molecules by repeated collisions and attachment.  
6 Neutral air molecules thus accelerated, constitute the useful mechanical output of the ion wind  
7 generator. The majority of ions, however, will end their usefulness upon reaching the ring **18**  
8 where they fan out radially and collide with the ring producing anode current. A small portion of  
9 the ions will possess sufficient kinetic energy to continue on through the ring along with the  
10 neutral particles. These result in a slight loss of efficiency because they tend to be drawn back to  
11 the anode. The same theory will apply for cathode **13** and anode **17**. Since opposite polarities  
12 are impressed on each cathode-anode pair, their exiting airstreams will contain oppositely  
13 charged ions which will merge and neutralize; i.e., being of opposite polarity, the ions will attract  
14 each other and be neutralized by recombination.” It is, however, not clear that substantially all  
15 ions which escape the electrodes will merge because many ions emerging from the anode on the  
16 left are likely to have such momentum toward the left that the electrical attraction for ions  
17 emerging from the anode on the right with momentum toward the right is insufficient to  
18 overcome such opposite momenta. Furthermore, the distance required for such recombination as  
19 does occur is very probably so great that it would be a detriment to using multiple stages to  
20 provide increased speed to the air.

## SUMMARY OF THE INVENTION

The present Electrostatic Fluid Accelerator employs two fundamental techniques to achieve significant speeds in the fluid flow, which can be virtually any fluid but is most often air, and which will not produce substantial undesired ozone and nitrogen oxides when the fluid is air.

First, to accelerate the fluid molecules significantly without having to impart high velocities to the ions, many ions are created within a given area so that there is a high density, or pressure, of ions. This is achieved by placing a multiplicity of corona electrodes close to one another. The corona electrodes can be placed near one another because they are electrically shielded from one another by exciting electrodes which have a potential difference, compared to the corona electrodes, adequate to generate a corona discharge. An exciting electrode is placed between adjacent corona electrodes and, thus, across the intended direction of flow for the fluid molecules.

In order to cause ions to create fluid flow, either the exciting electrode must be asymmetrically located between the adjacent corona electrodes (in order to create an asymmetrically shaped electric field that, unlike a symmetrical field, will force ions in a preferred direction) or there must be an accelerating electrode.

Preferably, in the case of an accelerating electrode, such accelerating electrode is an attracting electrode placed downstream from the corona electrodes in order to cause the ions to move in the intended direction. The electric polarity of the attracting electrode is opposite to that of the corona electrode.

It has, however, been experimentally determined that, when the corona electrodes are close to one another, if the electric potential of the exciting electrode is between that of the corona electrode and that of the attracting electrode, as in the case with respect to United States patent number 5,077,500, the rate of fluid flow decreases. Indeed, when the electric potential of the exciting electrodes is the same as that of the corona electrode, no fluid flow occurs. This effect results from the fact that the electric field strength between the exciting electrode and the corona electrodes is not adequate to cause a corona discharge and produce ions; the corona discharge between the corona electrode and the attracting electrode is suppressed; and the consequent lower density of ions is inadequate to produce the desired flow of fluid, or, as

1 explained above, any flow at all when the electric potential of the exciting electrodes is the same  
2 as that of the corona electrode. Furthermore, when the corona electrodes are placed close  
3 together in order to increase the density of ions, as described above, the electric field between the  
4 corona electrodes and the exciting electrodes influences the electric field between the corona  
5 electrodes and the attracting electrode. Thus, to achieve desirable flow rates, it is preferable to  
6 maintain the electric field strength between the exciting electrodes and the corona electrodes at a  
7 level that will produce a corona discharge and, consequently, a current flow from the corona  
8 electrodes to the exciting electrodes.

9 Yet, since the rate of fluid flow can be controlled by varying the electric field strength  
10 between the exciting electrode and the corona electrodes and since such electric field strength can  
11 be adjusted by varying the electric potential of the exciting electrode, the electric potential of the  
12 exciting electrodes can be varied in order to control the flow rate of the fluid with less  
13 expenditure of energy than when this is accomplished by controlling the potential of the  
14 attracting electrode.

15 Optionally, as suggested above, rather than using an attracting electrode as the  
16 accelerating electrode, a repelling electrode can be placed upstream from the corona electrode.  
17 The electrical polarity of the repelling electrode is the same as that of the corona electrode. From  
18 a repelling electrode, however, there is no corona discharge.

19 Second, in order to achieve the greatest flow of fluid, multiple stages of corona discharge  
20 devices are used with a collecting electrode between each stage. The collecting electrode has  
21 opposite electrical polarity to that of the corona electrodes. The collecting electrode is designed  
22 to preclude substantially all ions and other electrically charged particles from passing to the next  
23 stage and, therefore, being repelled by the corona electrodes of the next stage, which repulsion  
24 would retard the rate of fluid flow. The corona discharge device can be any such device that is  
25 known in the art but is preferably one utilizing the construction discussed above for increasing  
26 the density of ions.

27 A further optional technique for maximizing the density of ions is having a high-voltage  
28 power supply with a variable maximum voltage that depends on the corona current, which is  
29 defined as the total current from the corona electrode to any other electrode. The output voltage

1 of the high-voltage power supply is inversely proportional to the corona current. Therefore, the  
2 voltage applied to the corona electrodes is reduced sufficiently, when the corona current indicates  
3 that a breakdown is imminent, that such breakdown is precluded. Without this option, the  
4 voltage between the corona electrodes and the other electrodes (except, of course, repelling  
5 electrodes, where no corona discharge is desired) must be manually maintained between the  
6 corona inception voltage and the breakdown voltage to have a sufficient electric field strength to  
7 create a corona discharge between the corona electrodes and the other electrodes without causing  
8 a spark-producing breakdown that would preclude the creation of the desired ions. The closer  
9 the voltage between such electrodes approaches, without actually attaining, the breakdown  
10 voltage, however, the greater will be the density of the ions that are generated.

11 The voltage applied to any electrode other than the corona electrode can, furthermore,  
12 also be used to control the direction of movement of the ions and, therefore, of the fluid. If  
13 desired, electrodes may be introduced for this purpose alone.



## **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 illustrates schematically, by the way of example, a multiple corona and exciting electrodes arrangement.

Figure 2 illustrates schematically, by the way of example, another implementation of multiple corona and exciting electrodes arrangement.

Figure 3 illustrates schematically, by the way of example, a multiple corona and exciting electrodes arrangement including multiple attracting electrodes arrangement.

Figure 4 illustrates schematically, by the way of example, a multiple corona and exciting electrodes arrangement including multiple repelling electrodes arrangement.

Figure 5 illustrates schematically, by the way of example, a flexible top power supply flow diagram.

Figure 6 illustrates schematically, by the way of example, a flexible top power supply circuit diagram.

Figure 7 illustrates schematically, by the way of example, several stages of electrostatic fluid accelerators placed in series with respect to the desired fluid flow.

Figure 8 illustrates schematically, by the way of example, an electrostatic fluid accelerator that is capable of controlling fluid flow by changing a potential at the exciting electrodes.

## **DESCRIPTION OF THE PREFERRED EMBODIMENT**

In order to successfully create the desired rate of fluid flow, the high-voltage power supply should generate an output voltage that is higher than the corona onset voltage but, no matter what the surrounding environmental conditions, below the breakdown voltage.

To prevent a breakdown between electrodes, the high-voltage power supply should be sensitive to conditions that affect the breakdown voltage, such as humidity, temperature, etc. and reduce the output voltage to a level below the breakdown point.

Achieving this goal could require a rather costly high-voltage power supply with voltage and other sensors as well as a feedback loop control.

However, it was experimentally determined by the inventors that the corona current depends on the same conditions which affect the breakdown voltage. Thus, as indicated above, the voltage between the corona electrode and other electrodes (except the repelling electrodes, for which a corona discharge is not desired) should be maintained between the corona onset voltage and the breakdown voltage; and a preferred technique for maximizing the density of ions without having a breakdown, no matter what the surrounding environmental conditions are, is to utilize a high-voltage power supply with a variable maximum voltage that is inversely proportional to the corona current.

Such a high-voltage power supply is termed a "flexible top" high-voltage power supply.

The "flexible top" high-voltage power supply preferably consists of two power supply units connected in series. The first unit, which is termed the "base unit," generates an output voltage, termed the "base voltage," which is close to (above or below) the corona onset voltage and below the breakdown voltage and which, because of a low internal impedance in the unit, is only slightly sensitive to the output current. The second unit, which is termed the "flexible top," generates an output voltage that is much more sensitive to the output current than is the voltage of the base unit, *i.e.*, the base voltage, because of a large internal impedance. If output current increases, the base voltage will remain almost constant whereas the output voltage from the flexible top decreases. It is a matter of ordinary skill in the art to select the values of circuit components which will assure that, for any foreseeable environmental conditions, the combined

1 resultant output voltage from the base unit and the flexible top will be greater than the corona  
2 onset voltage but less than the breakdown voltage.

3 Moreover, once the need for the flexible top has been recognized, ordinary skill in the art  
4 can supply various methods of achieving such a power supply.

5 Perhaps, the simplest example of the flexible top high-voltage power supply is the  
6 following: A traditional high-voltage power supply is used for the base unit, and a step-up  
7 transformer with larger leakage inductance is employed in the flexible top. The alternating  
8 current flows through the leakage inductance, thereby creating a voltage drop across such  
9 inductance. The more current that is drawn, the more voltage drops across the leakage  
10 inductance; and the more voltage that is dropped across the leakage inductor, the less is the  
11 output voltage of the flexible top.

12 A second example of a flexible top high-voltage power supply utilizes a combination of  
13 capacitors of a voltage multiplier as depicted in Figure 6. The first set of capacitors have a much  
14 greater capacitance and, therefore, much lower impedance than the second set. Therefore, the  
15 voltage across the first set of capacitors (the base unit) is relatively insensitive to the current  
16 whereas the voltage across the second set of capacitors (the flexible top) is inversely proportional  
17 to the current.

18 It will be appreciated that a flexible top high-voltage power supply is any combination of  
19 bases units and flexible tops connected in series that do not depart from the spirit of the  
20 invention. Therefore, the flexible top high-voltage power supply may consist of any number of  
21 base units and flexible tops connected in series in any desired order so that the resultant output  
22 voltage is within the desired range.

23 The Electrostatic Fluid Accelerator of the present invention, thus, comprises a  
24 multiplicity of closely spaced corona electrodes with an exciting electrode asymmetrically  
25 located between the corona electrodes. A flexible top high-voltage power supply preferably  
26 controls the voltage between the corona electrodes and the exciting electrodes so that such  
27 voltage is maintained between the corona onset voltage and the breakdown voltage.

1            Optionally, however, the voltage between the corona electrodes and the exciting  
2 electrodes can be varied even outside the preceding range in order to vary the flow of the fluid  
3 which it is desired to move.

4            And in lieu of locating the exciting electrode asymmetrically between the corona  
5 electrodes, the Electrostatic Fluid Accelerator may further comprise an accelerating electrode.

6            The accelerating electrode may, as discussed above, either be an attracting electrode, a  
7 repelling electrode, or a combination of attracting and repelling electrodes.

8            An attracting electrode has electric polarity opposite to that of the corona electrode and is  
9 located, with respect to the desired direction of fluid flow, downstream from the corona  
10 electrode. The repelling electrode has the same electrical polarity as the corona electrode and is  
11 situated, with respect to the desired direction of fluid flow, upstream from the corona electrode.

12           To assure that more ions and, consequently, more fluid particles, flow downstream, the  
13 exciting electrode can be constructed in the form of a plate that extends downstream with respect  
14 to the desired direction of fluid flow.

15           Finally, as discussed above, in order to achieve the greatest flow of fluid, multiple stages  
16 of corona discharge devices, and preferably the Electrostatic Fluid Accelerator of the present  
17 invention, are used with a collecting electrode placed between each stage. The collecting  
18 electrode has opposite electrical polarity to that of the corona electrodes and is designed to  
19 preclude substantially all ions and other electrically charged particles from passing to the next  
20 stage, where they would tend to be repelled and thereby impair the movement of the fluid.  
21 Preferably, the collecting electrode is a wire mesh that extends substantially across the intended  
22 path for the fluid particles.

23           Figure 1 illustrates schematically a first embodiment of electrostatic fluid accelerator  
24 according to the invention which comprises multiple corona electrodes 1, multiple exciting  
25 electrodes 2, power supply 3. Corona electrodes 1 and exciting electrodes 2 are connected to the  
26 respective terminals of the power supply 3 by the means of conductors 4 and 5. The desired fluid  
27 flow is shown by an arrow. Corona electrodes 1 are located asymmetrically between exciting  
28 electrodes 2 with respect to the desired fluid flow. In the illustrated embodiment is assumed that  
29 corona electrodes 1 are wire-like electrodes (shown in cross section), exciting electrodes 2 are

1 plate-like electrodes (also shown in cross section) and a power supply 3 is a DC power supply. It  
2 will be understood that corona electrodes may be of any shape that ensures corona discharge and  
3 subsequent ion emission from one or more parts of said corona electrode. In general corona  
4 electrodes may be made in shape of needle, barbed wire, serrated plates or plates having sharp or  
5 thin parts that facilitate electric field raise at the vicinity of these parts of the corona electrodes. It  
6 will be understood that power supply may generate any voltage (direct, alternating or pulse) that  
7 has a magnitude great enough to raise an electric field strength at the vicinity of the corona  
8 electrodes 1 above corona onset value. In accordance with the present invention, the corona  
9 electrodes 1, exciting electrodes 2 and conductors 4 and 5 of the embodiment illustrated in FIG. 1  
10 are made of electrically conductive material that is capable to conduct a desired electrical current  
11 to the ion emitting parts of the corona electrodes and to the exciting electrodes. Corona  
12 electrodes 1 are supported by a frame (not shown) that ensures the corona electrodes 1 being  
13 parallel to the exciting electrodes 2. Power supply 3 generates voltage that creates an electric  
14 field in the space between the corona electrodes 1 and exciting electrodes 2. This electric field  
15 receives a maximum magnitude in the vicinity of the corona electrodes 1. When maximum  
16 magnitude of the electric field exceeds a corona onset voltage the corona electrodes 1 emit ions.  
17 Ions being emitted from the corona electrodes 1 are attracted to the exciting electrodes 2. Due to  
18 asymmetrical location of the corona electrodes 1 and the exciting electrodes 2 ions receive more  
19 acceleration toward the desired fluid flow shown by an arrow. More ions will therefore flow to  
20 the right (as shown in FIG. 1) than to the left. Ion movement to the direction of the desired fluid  
21 flow creates fluid flow to this direction due to ions' collision with the fluid molecules.

22 Figure 2 illustrates schematically a second embodiment of electrostatic fluid accelerator  
23 according to the invention which comprises multiple corona electrodes 6, multiple exciting  
24 electrodes 7, power supply 8. Corona electrodes 6 and exciting electrodes 7 are connected to the  
25 respective terminals of the power supply 8 by the means of conductors 9 and 10. The desired  
26 fluid flow is shown by an arrow. Corona electrodes 6 are located asymmetrically between  
27 exciting electrodes 7 with respect to the desired fluid flow. Corona electrodes 6 and exciting  
28 electrodes 7 are connected to the respective terminals of the power supply 8 by the means of  
29 conductors 9 and 10. The desired fluid flow is shown by an arrow. Corona electrodes 6 are

1 located asymmetrically between exciting electrodes 7 with respect to the desired fluid flow. In  
2 the illustrated embodiment is assumed that corona electrodes 6 are razor-like electrodes (shown  
3 in cross section), exciting electrodes 7 are plate-like electrodes (also shown in cross section) and  
4 a power supply 8 is a DC power supply. It will be understood FIG. 2 may as well represent the  
5 corona electrodes 6 in a shape of needles and the exciting electrodes 7 located asymmetrically  
6 between the corona needle-like electrodes. The preferred shape of the exciting electrodes 7 will  
7 be, but not limited to, honeycomb that separate the corona electrodes 6 from each other, said  
8 corona electrodes are located near the center of the honeycomb-like exciting electrodes. The  
9 power supply 8 may, as in previous embodiment generate any voltage (direct, alternating or  
10 pulse) that has a magnitude great enough to raise an electric field strength at the vicinity of the  
11 parts of the corona electrodes 6 that exceeds a corona onset value. In accordance with the present  
12 invention, the corona electrodes 6, exciting electrodes 7 and conductors 9 and 10 of the  
13 embodiment illustrated in FIG. 2 are made of electrically conductive material that is capable to  
14 conduct a desired electrical current to the ion emitting parts of the corona electrodes 6 to the  
15 exciting electrodes 7. Corona electrodes 6 are supported by a frame (not shown) that ensures the  
16 corona electrodes 6 being parallel to the exciting electrodes 7. Power supply 8 generates voltage  
17 that creates an electric field in the space between the corona electrodes 6 and exciting electrodes  
18 7. This electric field receives a maximum magnitude in the vicinity of the sharp edges (or sharp  
19 points in case of needle-like corona electrodes) of the corona electrodes 6. When maximum  
20 magnitude of the electric field exceeds a corona onset voltage the corona electrodes 6 emit ions.  
21 Ions being emitted from the sharp edges (or points) of the corona electrodes 6 are attracted to the  
22 exciting electrodes 7. Due to asymmetrical location of the corona electrodes 6 and the exciting  
23 electrodes 7 ions receive more acceleration toward the desired fluid flow shown by an arrow.  
24 More ions will therefore flow to the right (as shown in FIG. 2) than to the left. Ions' movement to  
25 the direction of the desired fluid flow creates fluid flow to this direction due to ions' collision  
26 with the fluid molecules.

27 Figure 3 illustrates schematically a third embodiment of electrostatic fluid accelerator  
28 according to the invention which comprises multiple corona electrodes 11, multiple exciting  
29 electrodes 12, multiple attracting electrodes 13, power supply 14. Corona electrodes 11 from one

1 hand and exciting electrodes 12 and attracting electrodes 13 from other hand are connected to the  
2 respective terminals of the power supply 14 by the means of conductors 15 and 16. The desired  
3 fluid flow is shown by an arrow. Corona electrodes 11 are located between exciting electrodes  
4 12 and separated by the last from each other. As an example wire-like corona electrodes 11 are  
5 shown in cross section, exciting electrodes 12 are plate-like electrodes and attracting electrodes  
6 13 are wire-like or rod-like electrodes (also shown in cross section) and a power supply 14 is a  
7 DC power supply. It will be understood FIG. 3 may as well represent the corona electrodes 11 in  
8 any other shape that ensures electric field strength in the vicinity of the corona electrodes 11  
9 great enough to initiate corona discharge. The power supply 14 may, as in previous  
10 embodiments (FIG. 1 and FIG. 2) generate any voltage (direct, alternating or pulse) that has a  
11 magnitude great enough to raise an electric field strength at the vicinity of the parts of the corona  
12 electrodes 11 that exceeds a corona onset value. In accordance with the present invention, the  
13 corona electrodes 11, exciting electrodes 12, attracting electrodes 13 and conductors 15 and 16 of  
14 the embodiment illustrated in FIG. 3 are made of electrically conductive material that is capable  
15 of conducting a desired electrical current to the ion emitting parts of the corona electrodes to the  
16 exciting electrodes 12 and to the attracting electrodes 13. Corona electrodes 11 are supported by  
17 a frame (not shown) that ensures the corona electrodes 11 being substantially parallel to the  
18 exciting electrodes 12 and to the attracting electrodes 13. Power supply 14 generates voltage that  
19 creates an electric field in the space between the corona electrodes 11 and exciting electrodes 12  
20 and the attracting electrodes 13. This electric field receives a maximum magnitude in the vicinity  
21 of the corona electrodes 11 (or sharp edges or sharp points in case of razor-like or needle-like  
22 corona electrodes). When the maximum magnitude of the electric field exceeds a corona onset  
23 voltage the corona electrodes 11 emit ions. Ions being emitted from the sharp edges (or points) of  
24 the corona electrodes 11 are attracted to the exciting electrodes 12 and to the attracting electrodes  
25 13 . Due to electrostatic force ions receive acceleration toward the desired fluid flow shown by  
26 an arrow. Ions will therefore flow to the right (as shown in FIG. 3). Ions' movement in the  
27 direction of the desired fluid flow creates fluid flow in this direction due to ions' collision with  
28 the fluid molecules.

Figure 4 illustrates schematically a fourth embodiment of electrostatic fluid accelerator according to the invention which comprises multiple corona electrodes 17, multiple exciting electrodes 18, multiple repelling electrodes 19, power supply 20. Corona electrodes 17 together with repelling electrodes 19 from one hand and exciting electrodes 18 from other hand are connected to the respective terminals of the power supply 20 by the means of conductors 21 and 22. The desired fluid flow is shown by an arrow. Corona electrodes 17 are located between exciting electrodes 18 and separated by the latter from each other. As an example wire-like corona electrodes 17 are shown in cross section, exciting electrodes 18 are plate-like electrodes and repelling electrodes 19 are wire-like or rod-like electrodes (also shown in cross section) and a power supply 20 is a DC power supply. It will be understood FIG. 4 may as well represent the corona electrodes 17 in any other shape that ensures electric field strength in the vicinity of the corona electrodes 17 great enough to initiate corona discharge. The power supply 20 may, as in previous embodiments generate any voltage (direct, alternating or pulse) that has a magnitude great enough to raise an electric field strength at the vicinity of the parts of the corona electrodes 17 that exceeds a corona onset value. In accordance with the present invention, the corona electrodes 17, exciting electrodes 18, repelling electrodes 19 and conductors 21 and 22 of the embodiment illustrated in FIG. 4 are made of electrically conductive material that is capable to conduct a desired electrical current to the ion emitting parts of the corona electrodes to the exciting electrodes 17. Corona electrodes 17 are supported by a frame (not shown) that ensures the corona electrodes 17 being substantially parallel to the exciting electrodes 18 and to the repelling electrodes 19. Power supply 20 generates voltage that creates an electric field in the space between the corona electrodes 17 and exciting electrodes 18. This electric field receives a maximum magnitude in the vicinity of the corona electrodes 17 (or sharp edges or sharp points in case of razor-like or needle-like corona electrodes). When maximum magnitude of the electric field exceeds a corona onset voltage the corona electrodes 17 emit ions. Ions being emitted from the sharp edges (or points) of the corona electrodes 17 are attracted to the exciting electrodes 18 and at the same time are repelled from repelling electrodes 19. Due to electrostatic force ions receive acceleration toward the desired fluid flow shown by an arrow. Ions will therefore flow to the right (as shown in FIG. 4). Ions' movement to the direction of the desired fluid flow creates



1 fluid flow to this direction due to ions' collision with the fluid molecules. It will be understood  
2 that the repelling electrodes 19 may be made of any shape that ensures that an electric strength in  
3 the vicinity of the repelling electrodes 19 is below corona onset value. To ensure that  
4 comparatively low value the repelling electrodes 19 may be made of greater main size than the  
5 corona electrodes 17. As another option the repelling electrodes 19 may not have sharp edges or  
6 do not have serrated surface.

7 Figure 5 illustrates schematically flexible top power supply flow diagram. According to  
8 the invention the power supply consists of two functional parts - base part 23 and flexible part  
9 24. The base part 24 produces output voltage 25 and flexible top part 24 produces output voltage  
10 26. Both voltages 25 and 26 gives output voltage of power supply that is equal to their sum, i.e.  
11 27. Each part of power supply in FIG. 5 may be made of any of known design. It may be a  
12 transformer-rectifier, or voltage multiplier, or fly-back configuration, or combination of the  
13 above. The base part 23 and flexible top part 24 may be of similar of different design as well.  
14 The only difference between the base part 23 and the flexible top part 24 that is relevant to the  
15 purpose of this invention is the dependence of output voltage of output current. The base part 23  
16 generates output voltage 25 that is less dependent on output current. The flexible top part 24  
17 generates output voltage 26 that drops significantly with output current increase. The base part  
18 23 generates output voltage 25 that is close to the corona onset voltage of the corona electrodes.  
19 This voltage 25 may be equal to the corona onset voltage or it may be slightly more or less than  
20 that corona onset voltage. This corona onset voltage depends on the electrodes geometry and  
21 environment as well. It is experimentally determined that the corona onset voltage has smaller  
22 value under higher temperature. From the other hand the base voltage 25 should not be greater  
23 than breakdown voltage between the corona and other electrodes. This breakdown voltage also  
24 varies with temperature and other factors. Therefore it is desirable to maintain voltage 25 at the  
25 level that is close to the corona onset voltage but does not exceed breakdown voltage under any  
26 environment condition specific for an application. The flexible part 24 generates output voltage  
27 that in combination with the voltage 25 gives total output voltage 27 that is greater than corona  
28 onset voltage but lesser than breakdown voltage. It is experimentally determined that corona  
29 current depends of the voltage between the electrodes nonlinearly. Corona current starts at the

1 corona onset voltage and reaches maximum value as the voltage approaches a breakdown level.  
2 To ensure that total output voltage of power supply will never reach a breakdown level output  
3 voltage 26 decreases as the corona current approaches its maximum value. At the same time total  
4 output voltage 27 will always be above corona onset level. This ensures corona discharge and  
5 fluid flow at any condition.

6 Figure 6 illustrates flexible top power supply circuit diagram. Power supply shown in  
7 FIG. 6 generates high voltage at the level between 10,000V and 15,000V. Power train of this  
8 power supply consists of power transistor Q1, High Voltage fly-back inductor T1 and voltage  
9 multiplier (capacitors C1 - C8 and diodes D8 - D15). Pulse Width Modulator Integrated Circuit  
10 UC3843N periodically switches transistor Q1 ON and OFF with frequency that exceeds audible <sup>I.K.</sup>  
11 frequency to ensure silent operation. Potentiometer 5k controls duty cycle and is used for output <sup>RT.</sup>  
12 voltage control. Shunt 1 Ohm connected between Q1 source and ground senses output current  
13 and turns transistor Q1 OFF if current exceeds preset level. The preset level in power supply  
14 shown in FIG. 6 is equal approximately 1A. Capacitors C1 - C 6 have value that exceeds the  
15 value of the capacitors C8 - C7. The sum of the voltages across capacitors C1, C4 and C6  
16 constitutes the base voltage 25. <sup>I.K. RT.</sup> The voltage across capacitor C8 represents the flexible top  
17 voltage 26. The sum of the voltages 25 and 26 represents output voltage 27 of the flexible top  
18 power supply. It will be understood that any configuration of power supply of a combination of  
19 power supplies that consists of one or more base parts or power supplies and one or more parts or  
20 flexible top power supplies falls under spirit of this invention. As an another example of such  
21 flexible top power supply simplest transformer-rectifier configuration may be considered (not  
22 shown here). The transformer may consist of a primary winding and at least two secondary  
23 windings. Each secondary winding is connected to a separate rectifier. The DC outputs of these  
24 rectifiers are connected in series. One of the secondary windings has greater leakage inductance  
25 with respect to the primary winding than the leakage inductance of another secondary winding  
26 with respect to the primary winding. When a corona current grows voltage drop across that  
27 greater leakage inductance grows and output voltage of the power supply decreases to safe level.

28 Figure 7 illustrates several stages 28, 29 and 30 of an electrostatic fluid accelerators  
29 placed in series with respect to the desired fluid flow. In accordance to the present invention each

1 stage is separated from another stage by the collecting electrodes 31 and 32. Each stage 28, 29  
 2 and 30 are powered by power supply 33 and accelerate fluid by generating ions at corona  
 3 discharge and then accelerating ions toward the desired fluid flow (shown by the arrow). Ions  
 4 and other charged particles travel from the vicinity of the corona electrodes through the area  
 5 surrounded by the exciting electrodes and toward next stage. Part of these ions and particles  
 6 settle on the exciting electrodes. Part of these particles, however, travel beyond the electrodes of  
 7 a particular stage. These ions and particles go as far as to the next stage and repel from the  
 8 corona electrodes of the next stage. Ions and particles slow their movement toward the desired  
 9 fluid movement and even travel back in the opposite direction. This event decreases total fluid  
 10 velocity and fluid accelerator efficiency. To prevent such an event collecting electrodes 31 and  
 11 32 are installed in between of the stages. These collecting electrodes are placed close to each  
 12 other and connected to the polarity that is opposite to the polarity of the corona electrodes. Ions  
 13 and charged particles that travel beyond the stages are attracted to the collecting electrodes 31  
 14 and 32 and give their charge to these electrodes. By that means no or almost no charged particles  
 15 travel to the next stage. In the FIG. 7 all collecting electrodes are connected to the same power  
 16 supply 33 terminal as the exciting electrodes of the stage 28, 29 and 30. It will be understood that  
 17 these collecting electrodes may be connected to or be under any electric potential that is opposite  
 18 to the potential of the corona electrodes. It will be understood that some of the electrodes may be  
 19 connected to different power supplies including variable power supplies.

20 Figure 8 illustrates electrostatic fluid accelerator that is capable to control fluid flow by  
 21 changing a potential at the exciting electrodes. The electrostatic fluid accelerator shown in FIG.  
 22 8 consists of multiple corona electrodes 41, multiple exciting electrodes 34 and multiple  
 23 attracting electrodes 35. The geometry and mutual locating of all the electrodes is similar to what  
 24 is shown in FIG. 3. The electrostatic fluid generator shown in FIG. 8 is powered by two power  
 25 supplies. The attracting electrodes 35 are connected to the common point of the two power  
 26 supplies. This common point is shown as a ground, but may be at any arbitrary electric potential.  
 27 Power supply 36 is connected to the common point by means of conductors 40 and to the corona  
 28 electrodes 41 by the mean of conductors 38. Power supply 36 produces stable DC voltage. Power

supply 37 is connected to the common point by conductors 40 and to the exciting electrodes by conductors 39. Power supply 37 produces variable DC voltage.

If electric field strength in the area between the corona electrodes 41 and the exciting electrodes 34 is approximately equal to the electric field strength in the area between the corona electrodes 41 and the attracting electrodes 35 the electric current's magnitude that flows from the corona electrodes 41 to the exciting electrodes 34 is approximately equal to the electric current's magnitude that flows from the corona electrodes 41 to the attracting electrodes 35. It is experimentally determined that approximately equal electric field strength is most favorable for the corona discharge for the described electrodes geometry and mutual location. It was further determined that when the electric field strength in the area between the corona electrodes 41 and the exciting electrodes 34 is less than that of the electric field strength in the area between the corona electrodes 41 and the attracting electrodes 35 the corona discharge is suppressed and fewer ions are emitted from the corona discharge. When electric field strength in the area between the corona electrodes 41 and the exciting electrodes 34 is approximately half of the electric field strength in the area between the corona electrodes 41 and the attracting electrodes 35 the corona discharge is almost totally suppressed and almost no <sup>or</sup> fewer ions are emitted from the corona discharge and no fluid movement is detected.

It will be understood that because of nature of a corona discharge a flexible top power supply may be successfully used with any combination of electrodes for corona discharge initiating and maintenance.

It will be further understood that any set of multiple electrodes may be located and/or secured on the separate frame. This frame must have an opening through which fluid freely flows. It may be a rectangular frame or u-shape frame or any other. Two or more frames on which the multiple set of the electrodes is located are then secured in the manner that ensures sufficient distance along the surface to prevent so called creeping discharge along this surface.

The above arrangements were successfully tested. The distance between exciting electrodes was 2 to 5 mm., the diameter of the corona electrodes was 0.1 mm and the exciting electrodes' width was about 12 mm. The attracting electrodes' diameter was 0.75 mm. The corona electrodes were made of tungsten wire while the exciting electrodes were made of

1 aluminum foil, and the exciting electrodes were made of brass and steel rods. At a voltage for  
2 the corona electrodes (the exciting and attracting electrodes being grounded) in the magnitude of  
3 2,000 volts to 7,500 volts, air flow was measured at a maximum rate of 950 feet per minute. In  
4 terms of the voltage applied to the exciting electrodes, air flow was at a maximum value when  
5 the exciting electrodes' potential was close to voltage of the attracting electrodes. When the  
6 potential at the exciting electrodes approached the potential of the corona electrodes, the air flow  
7 decreased and eventually dropped to an undetectable level.

05402001040000

**CLAIMS**

We claim:

1. An electrostatic fluid accelerator, which comprises:  
a multiplicity of closely spaced corona electrodes; and  
at least one exciting electrode asymmetrically located between said corona electrodes.
2. The electrostatic fluid accelerator as recited in claim 1, wherein:  
the voltage between said corona electrodes and said exciting electrodes is maintained between the corona onset voltage and the breakdown voltage.
3. The electrostatic fluid accelerator as recited in claim 2, wherein:  
the voltage between said corona electrodes and said exciting is controlled by a flexible top high-voltage power supply.
4. The electrostatic fluid accelerator as recited in claim 3, wherein:  
said exciting electrode is a plate or set of plates that extend downstream with respect to the desired direction of fluid flow.
5. The electrostatic fluid accelerator as recited in claim 4, further comprising:  
one or more additional electrostatic fluid accelerators as recited in claim 4, each of said additional electrostatic fluid accelerators being located downstream, with respect to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator; and  
at least one collecting electrode located between at least one pair of said electrostatic fluid accelerators.
6. The electrostatic fluid accelerator as recited in claim 3, further comprising:  
one or more additional electrostatic fluid accelerators as recited in claim 3, each of said additional electrostatic fluid accelerators being located downstream, with respect to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator; and  
at least one collecting electrode located between at least one pair of said electrostatic fluid accelerators.

- 1           7.       The electrostatic fluid accelerator as recited in claim 2, wherein:  
2               said exciting electrode is a plate that extends downstream with respect to the  
3               desired direction of fluid flow.
- 1           8.       The electrostatic fluid accelerator as recited in claim 7, further comprising:  
2               one or more additional electrostatic fluid accelerators as recited in claim 7, each of  
3               said additional electrostatic fluid accelerators being located downstream, with respect to  
4               the desired direction of fluid flow, from said preceding electrostatic fluid accelerator; and  
5               at least one collecting electrode located between at least one pair of said  
6               electrostatic fluid accelerators.
- 1           9.       The electrostatic fluid accelerator as recited in claim 2, further comprising:  
2               one or more additional electrostatic fluid accelerators as recited in claim 2, each of  
3               said additional electrostatic fluid accelerators being located downstream, with respect to  
4               the desired direction of fluid flow, from said preceding electrostatic fluid accelerator; and  
5               at least one collecting electrode located between at least one pair of said  
6               electrostatic fluid accelerators.
- 1           10.      The electrostatic fluid accelerator as recited in claim 1, wherein:  
2               the voltage between said corona electrodes and said exciting electrodes is  
3               variable, even outside the range between the corona onset voltage and the breakdown  
4               voltage.
- 1           11.      The electrostatic fluid accelerator as recited in claim 10, wherein:  
2               said exciting electrode is a plate that extends downstream with respect to the  
3               desired direction of fluid flow.
- 1           12.      The electrostatic fluid accelerator as recited in claim 11 further comprising:  
2               one or more additional electrostatic fluid accelerators as recited in claim 11, each  
3               of said additional electrostatic fluid accelerators being located downstream, with respect  
4               to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5               and  
6               at least one collecting electrode located between at least one pair of said  
7               electrostatic fluid accelerators.

- 1       13.     The electrostatic fluid accelerator as recited in claim 10 further comprising:  
2                 one or more additional electrostatic fluid accelerators as recited in claim 10, each  
3       of said additional electrostatic fluid accelerators being located downstream, with respect  
4       to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5       and  
6                 at least one collecting electrode located between at least one pair of said  
7       electrostatic fluid accelerators.  
8       14.     An electrostatic fluid accelerator, which comprises:  
9                 a multiplicity of closely spaced corona electrodes;  
10                at least one exciting electrode located between said corona electrodes; and  
11                at least one accelerating electrode.  
1       15.     The electrostatic fluid accelerator as recited in claim 14, wherein:  
2                 the voltage between said corona electrodes and said accelerating electrodes is  
3       maintained between the corona onset voltage and the breakdown voltage.  
4  
1       16.     The electrostatic fluid accelerator as recited in claim 14, wherein:  
2                 the voltage between said corona electrodes and said exciting electrodes is  
3       maintained between the corona onset voltage and the breakdown voltage.  
1       17.     The electrostatic fluid accelerator as recited in claim 16, wherein:  
2                 the accelerating electrode is an attracting electrode, said attracting electrode  
3       having opposite electrical polarity to that of said corona electrodes and said attracting  
4       electrode being located, with respect to the desired direction of fluid flow, downstream  
5       from said corona electrodes.  
1       18.     The electrostatic fluid accelerator as recited in claim 17, wherein:  
2                 the voltage between said corona electrodes and said exciting electrode is  
3       controlled by a flexible top high-voltage power supply.  
1       19.     The electrostatic fluid accelerator as recited in claim 18, wherein:  
2                 said exciting electrode is a plate that extends downstream with respect to the  
3       desired direction of fluid flow.



- 1           20.     The electrostatic fluid accelerator as recited in claim 19, further comprising:  
2                     one or more additional electrostatic fluid accelerators as recited in claim 19, each  
3                     of said additional electrostatic fluid accelerators being located downstream, with respect  
4                     to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5                     and  
6                     at least one collecting electrode located between at least one pair of said  
7                     electrostatic fluid accelerators.
- 1           21.     The electrostatic fluid accelerator as recited in claim 18, further comprising:  
2                     one or more additional electrostatic fluid accelerators as recited in claim 18, each  
3                     of said additional electrostatic fluid accelerators being located downstream, with respect  
4                     to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5                     and  
6                     at least one collecting electrode located between at least one pair of said  
7                     electrostatic fluid accelerators.
- 1           22.     The electrostatic fluid accelerator as recited in claim 17, wherein:  
2                     said exciting electrode is a plate that extends downstream with respect to the  
3                     desired direction of fluid flow.
- 1           23.     The electrostatic fluid accelerator as recited in claim 22, further comprising:  
2                     one or more additional electrostatic fluid accelerators as recited in claim 22, each  
3                     of said additional electrostatic fluid accelerators being located downstream, with respect  
4                     to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5                     and  
6                     at least one collecting electrode located between at least one pair of said  
7                     electrostatic fluid accelerators.
- 1           24.     The electrostatic fluid accelerator as recited in claim 17, further comprising:  
2                     one or more additional electrostatic fluid accelerators as recited in claim 17, each  
3                     of said additional electrostatic fluid accelerators being located downstream, with respect  
4                     to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5                     and

6 at least one collecting electrode located between at least one pair of said  
7 electrostatic fluid accelerators.

1 25. The electrostatic fluid accelerator as recited in claim 16, wherein:

2 the accelerating electrode is a repelling electrode, said repelling electrode having  
3 the same electrical polarity as that of said corona electrodes and said repelling electrode  
4 being located, with respect to the desired direction of fluid flow, upstream from said  
5 corona electrodes.

1 26. The electrostatic fluid accelerator as recited in claim 25, wherein:

2 the voltage between said corona electrodes and said exciting electrode is  
3 controlled by a flexible top high-voltage power supply.

1 27. The electrostatic fluid accelerator as recited in claim 26, wherein:

2 said exciting electrode is a plate or set of plates that extends downstream with  
3 respect to the desired direction of fluid flow.

1 28. The electrostatic fluid accelerator as recited in claim 27, further comprising:

2 one or more additional electrostatic fluid accelerators as recited in claim 27, each  
3 of said additional electrostatic fluid accelerators being located downstream, with respect  
4 to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5 and

6 at least one collecting electrode located between at least one pair of said  
7 electrostatic fluid accelerators.

1 29. The electrostatic fluid accelerator as recited in claim 26, further comprising:

2 one or more additional electrostatic fluid accelerators as recited in claim 26, each  
3 of said additional electrostatic fluid accelerators being located downstream, with respect  
4 to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5 and

6 at least one collecting electrode located between at least one pair of said  
7 electrostatic fluid accelerators.


- 1 30. The electrostatic fluid accelerator as recited in claim 25, wherein:  
2 said exciting electrode is a plate that extends downstream with respect to the  
3 desired direction of fluid flow.
- 1 31. The electrostatic fluid accelerator as recited in claim 30, further comprising:  
2 one or more additional electrostatic fluid accelerators as recited in claim 30, each  
3 of said additional electrostatic fluid accelerators being located downstream, with respect  
4 to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5 and  
6 at least one collecting electrode located between at least one pair of said  
7 electrostatic fluid accelerators.
- 1 32. The electrostatic fluid accelerator as recited in claim 25, further comprising:  
2 one or more additional electrostatic fluid accelerators as recited in claim 25, each  
3 of said additional electrostatic fluid accelerators being located downstream, with respect  
4 to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5 and  
6 at least one collecting electrode located between at least one pair of said  
7 electrostatic fluid accelerators.
- 1 33. The electrostatic fluid accelerator as recited in claim 14, wherein:  
2 the voltage between said corona electrodes and said exciting electrodes is  
3 variable, even outside the range between the corona onset voltage and the breakdown  
4 voltage.
- 1 34. The electrostatic fluid accelerator as recited in claim 33, wherein:  
2 the accelerating electrode is an attracting electrode, said attracting electrode  
3 having opposite electrical polarity to that of said corona electrodes and said attracting  
4 electrode being located, with respect to the desired direction of fluid flow, downstream  
5 from said corona electrodes.
- 1 35. The electrostatic fluid accelerator as recited in claim 34, wherein:  
2 said exciting electrode is a plate that extends downstream with respect to the  
3 desired direction of fluid flow.

- 1 36. The electrostatic fluid accelerator as recited in claim 35 further comprising:  
2 one or more additional electrostatic fluid accelerators as recited in claim 35, each  
3 of said additional electrostatic fluid accelerators being located downstream, with respect  
4 to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5 and  
6 at least one collecting electrode located between at least one pair of said  
7 electrostatic fluid accelerators.
- 1 37. The electrostatic fluid accelerator as recited in claim 34 further comprising:  
2 one or more additional electrostatic fluid accelerators as recited in claim 34, each  
3 of said additional electrostatic fluid accelerators being located downstream, with respect  
4 to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5 and  
6 at least one collecting electrode located between at least one pair of said  
7 electrostatic fluid accelerators.
- 1 38. The electrostatic fluid accelerator as recited in claim 33, wherein:  
2 the accelerating electrode is a repelling electrode, said repelling electrode having  
3 the same electrical polarity as that of said corona electrodes and said repelling electrode  
4 being located, with respect to the desired direction of fluid flow, upstream from said  
5 corona electrodes.
- 1 39. The electrostatic fluid accelerator as recited in claim 38, wherein:  
2 said exciting electrode is a plate that extends downstream with respect to the  
3 desired direction of fluid flow.
- 1 40. The electrostatic fluid accelerator as recited in claim 39 further comprising:  
2 one or more additional electrostatic fluid accelerators as recited in claim 39, each  
3 of said additional electrostatic fluid accelerators being located downstream, with respect  
4 to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5 and  
6 at least one collecting electrode located between at least one pair of said  
7 electrostatic fluid accelerators.

- 1 41. The electrostatic fluid accelerator as recited in claim 38 further comprising:  
2 one or more additional electrostatic fluid accelerators as recited in claim 38, each  
3 of said additional electrostatic fluid accelerators being located downstream, with respect  
4 to the desired direction of fluid flow, from said preceding electrostatic fluid accelerator;  
5 and  
6 at least one collecting electrode located between at least one pair of said  
7 electrostatic fluid accelerators.
- 1 42. An electrostatic fluid accelerator, which comprises:  
2 any corona discharge device that is well known in the art for moving a fluid;  
3 one or more additional corona discharge devices that are well known in the art for  
4 moving a fluid, each of said additional corona discharge devices being located  
5 downstream, with respect to the desired direction of fluid flow, from said preceding  
6 corona discharge device; and  
7 at least one collecting electrode located between at least one pair of said  
8 electrostatic fluid accelerators.
- 1 43. A flexible top high-voltage power supply, which comprises:  
2 a base unit that produces a voltage which is only slightly sensitive to the output  
3 current of the power supply;  
4 a second unit that produces an output voltage which decreases with increasing  
5 output current from the power supply; and  
6 a means for combining the voltages from said base unit and said second unit.
- 1 44. A device employing electrodes, which comprises:  
2 a set of electrodes capable of producing a corona discharge; and  
3 a flexible top high-voltage power supply electrically connected to said set of  
4 electrodes.
- 1 45. The device employing electrodes as recited in claim 44, wherein:  
2 at least one set of electrodes is located in a separate frame having an opening for  
3 free fluid passage.

### **ABSTRACT**

An electrostatic fluid accelerator having a multiplicity of closely spaced corona electrodes. The close spacing of such corona electrodes is obtainable because such corona electrodes are isolated from one another with exciting electrodes. Either the exciting electrode must be placed asymmetrically between adjacent corona electrodes or an accelerating electrode must be employed. The accelerating electrode can be either an attracting or a repelling electrode. Preferably, the voltage between the corona electrodes and the exciting electrodes is maintained between the corona onset voltage and the breakdown voltage with a flexible top high-voltage power supply. Optionally, however, the voltage between the corona electrodes and the exciting electrodes can be varied, even outside the range between the corona onset voltage and the breakdown voltage, in to vary the flow of fluid. And, to achieve the greatest flow of fluid, multiple stages of the individual Electrostatic Fluid Accelerator are utilized with a collecting electrode between successive stages in order to preclude substantially all ions and other electrically charged particles from passing to the next stage, where they would tend to be repelled and thereby impair the movement of the fluid. Finally, constructing the exciting electrode in the form of a plate that extends downstream with respect to the desired direction of fluid flow also assures that more ions and, consequently, more fluid particles flow downstream.

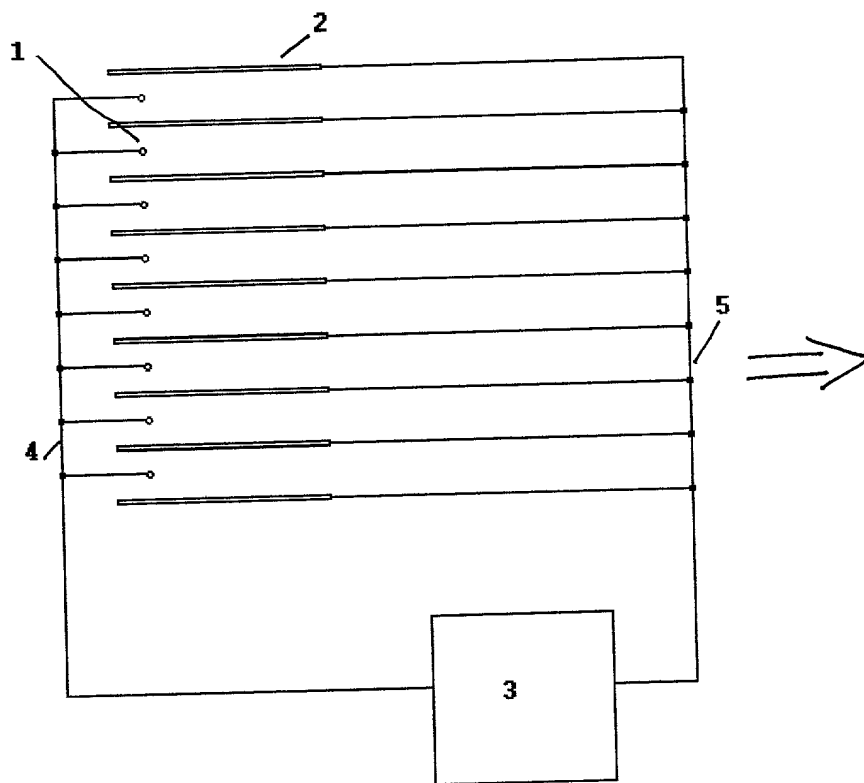

**Figure 1**

0044020-004400

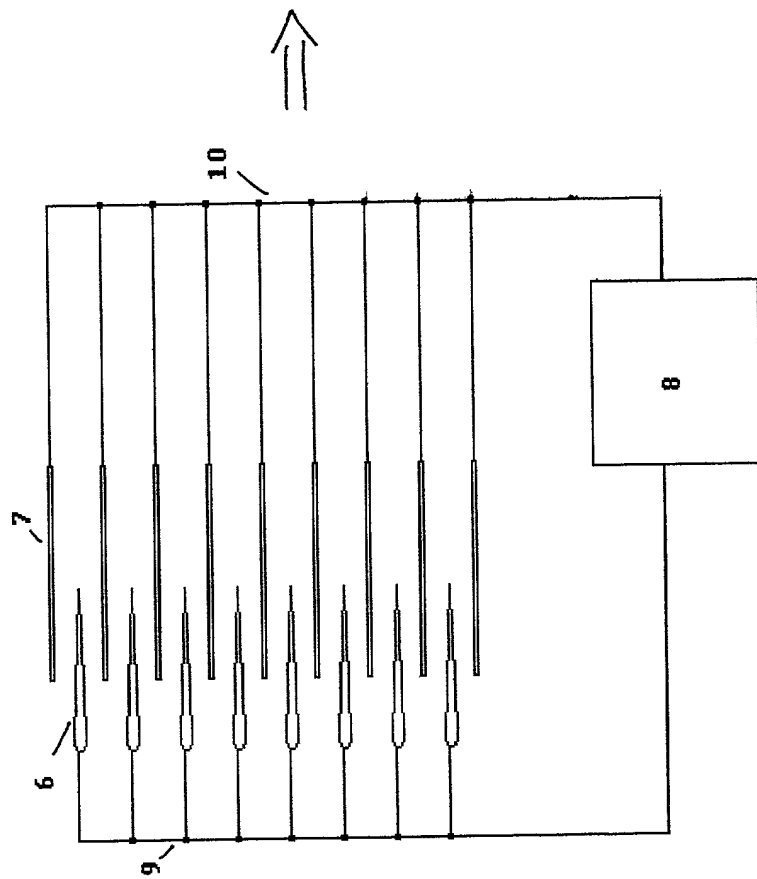


Figure 2



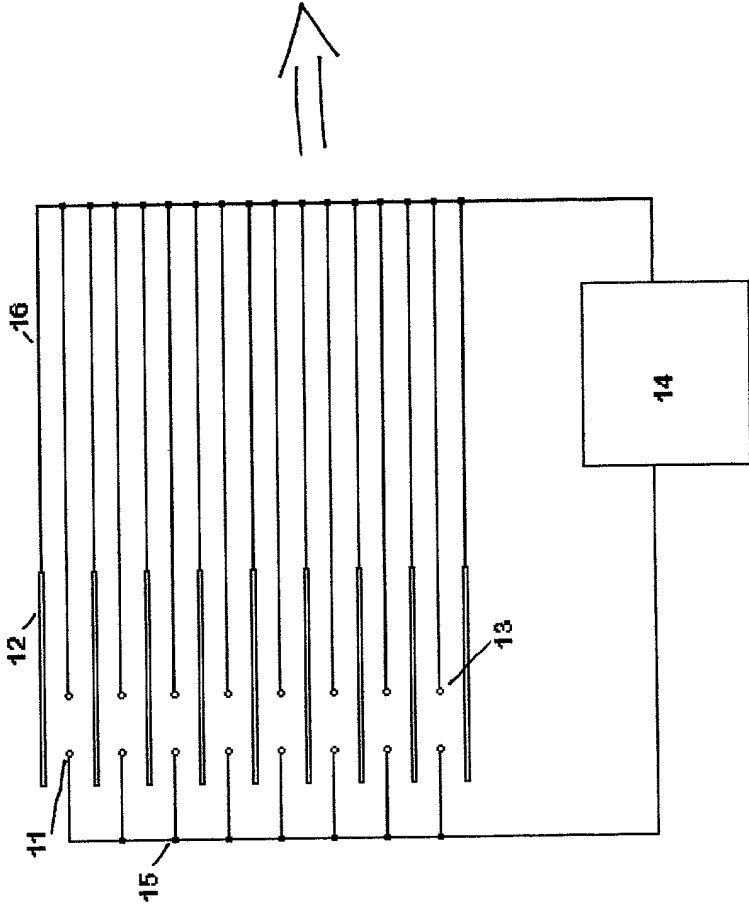


Figure 3

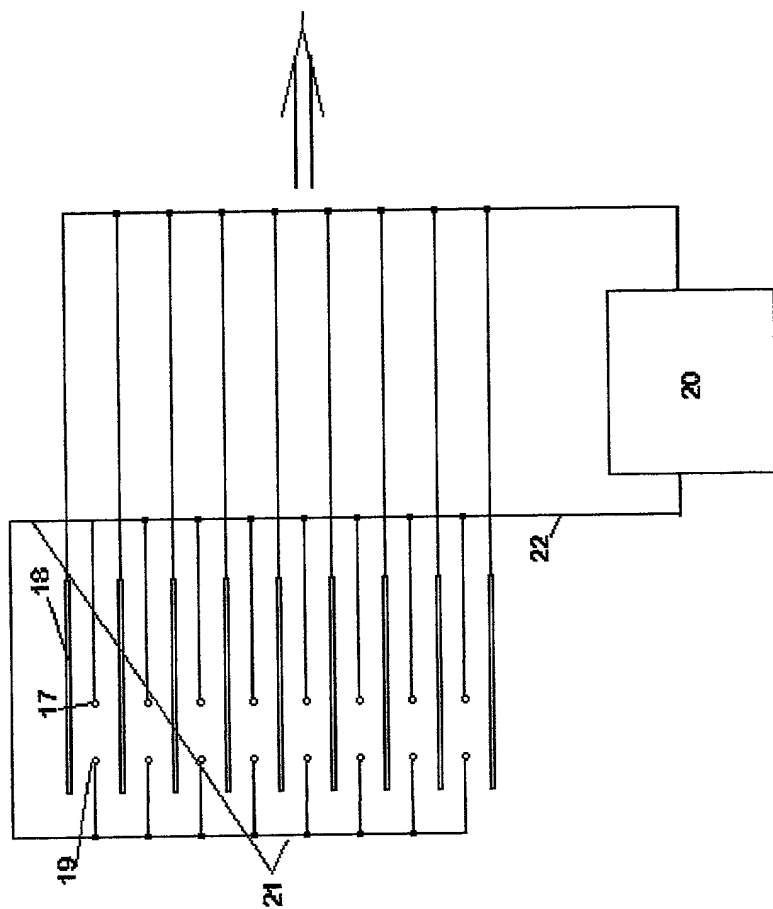


Figure 4

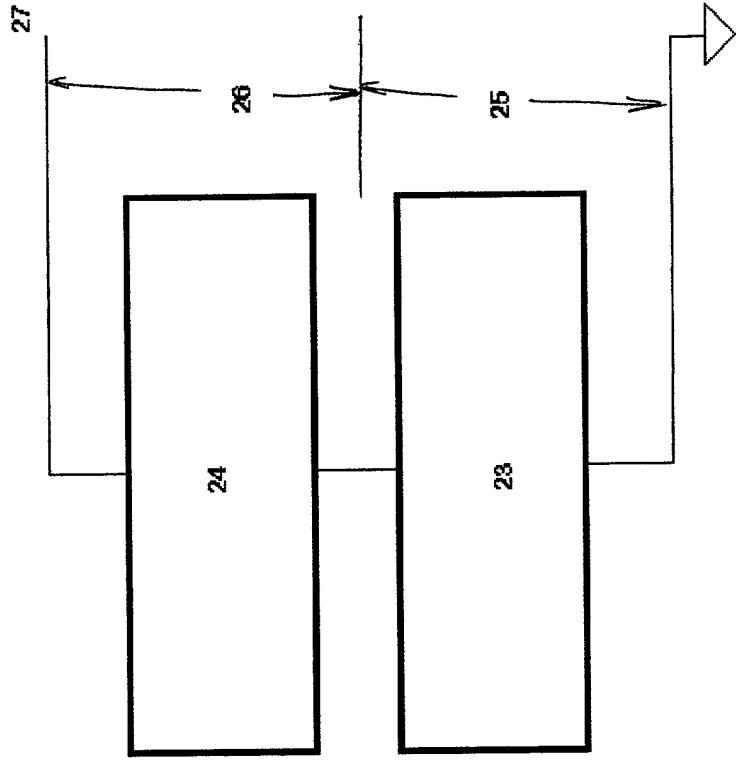


Figure 5

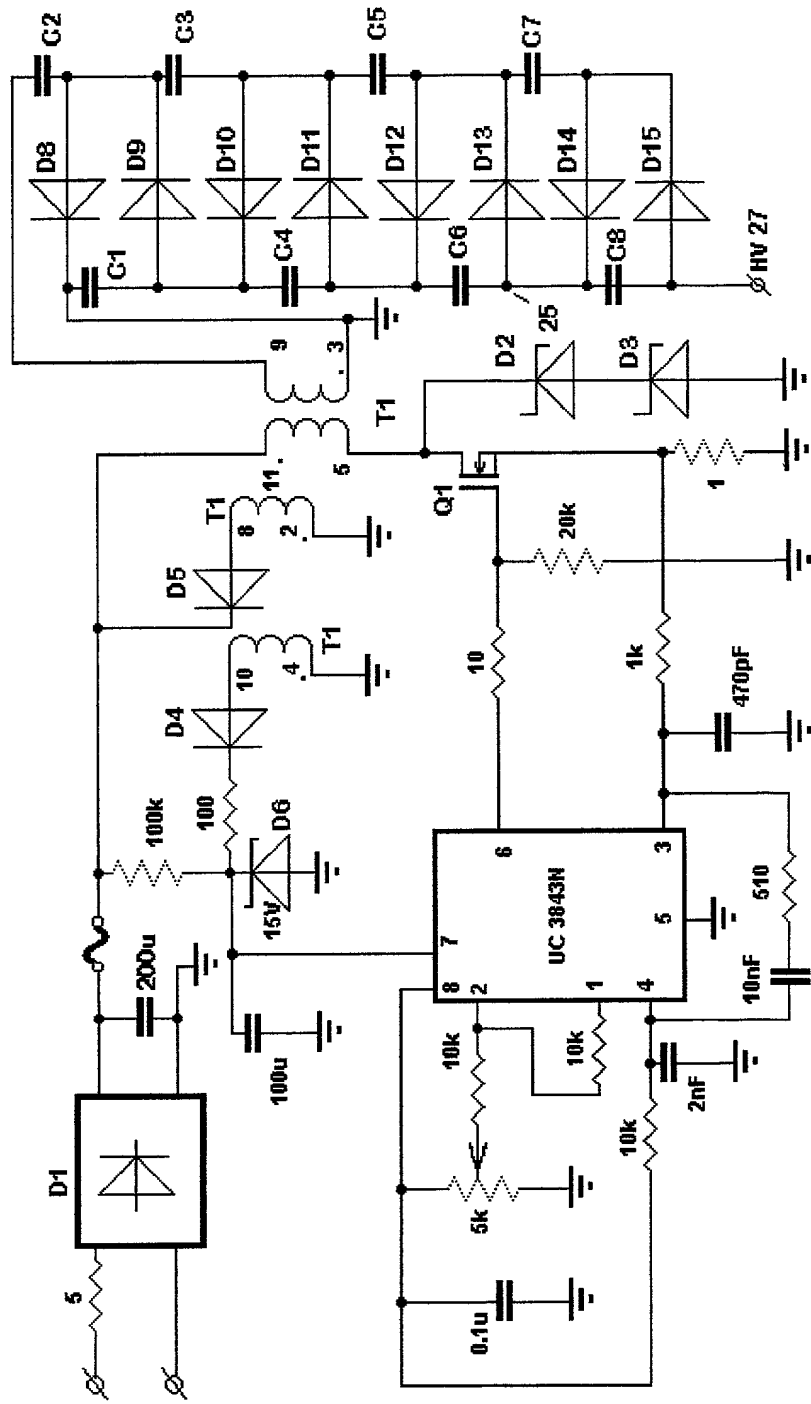


Figure 6

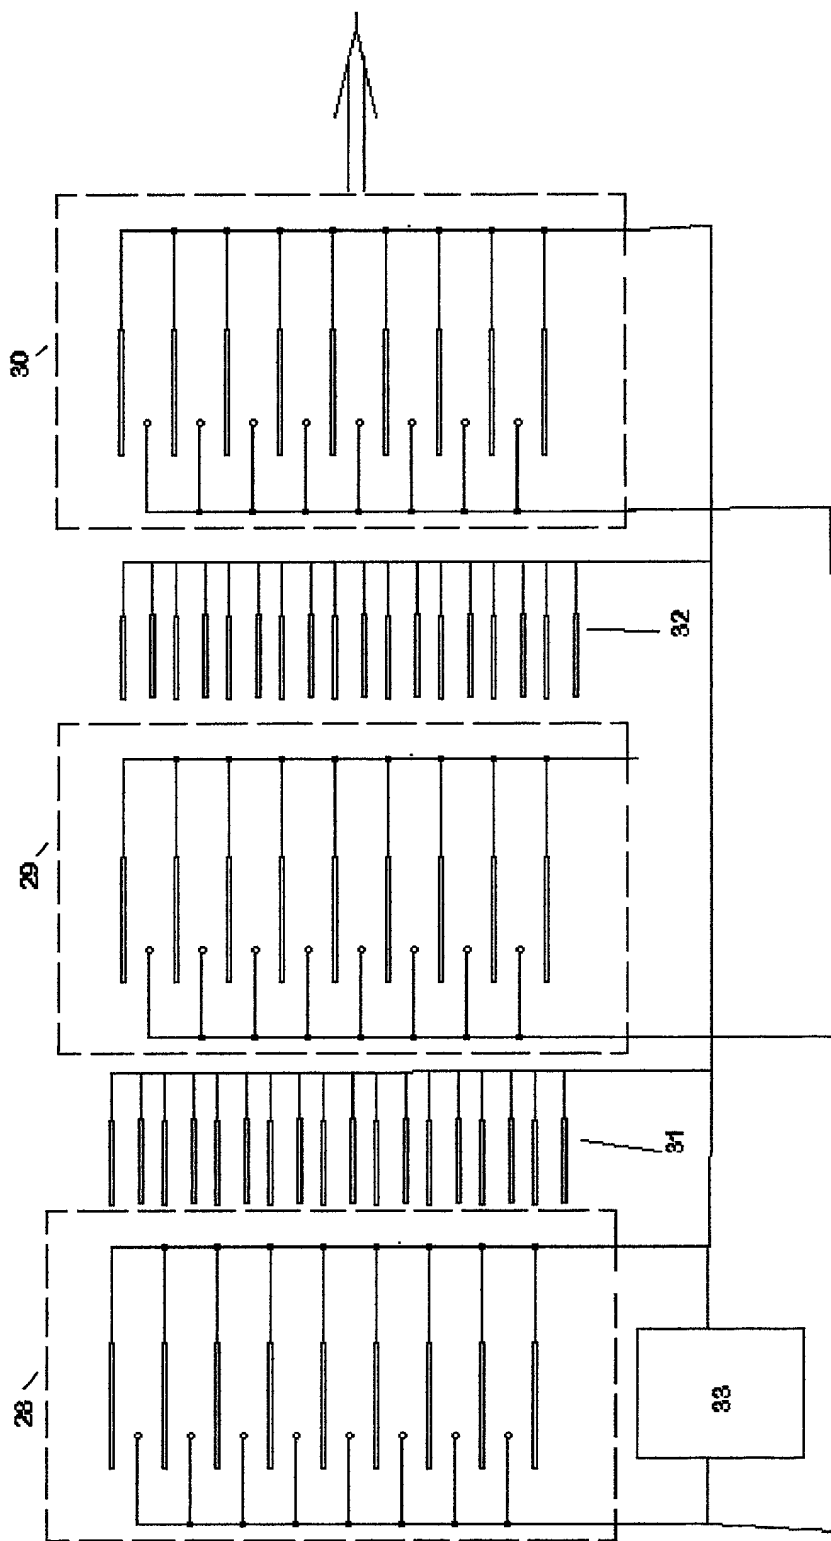


Figure 7

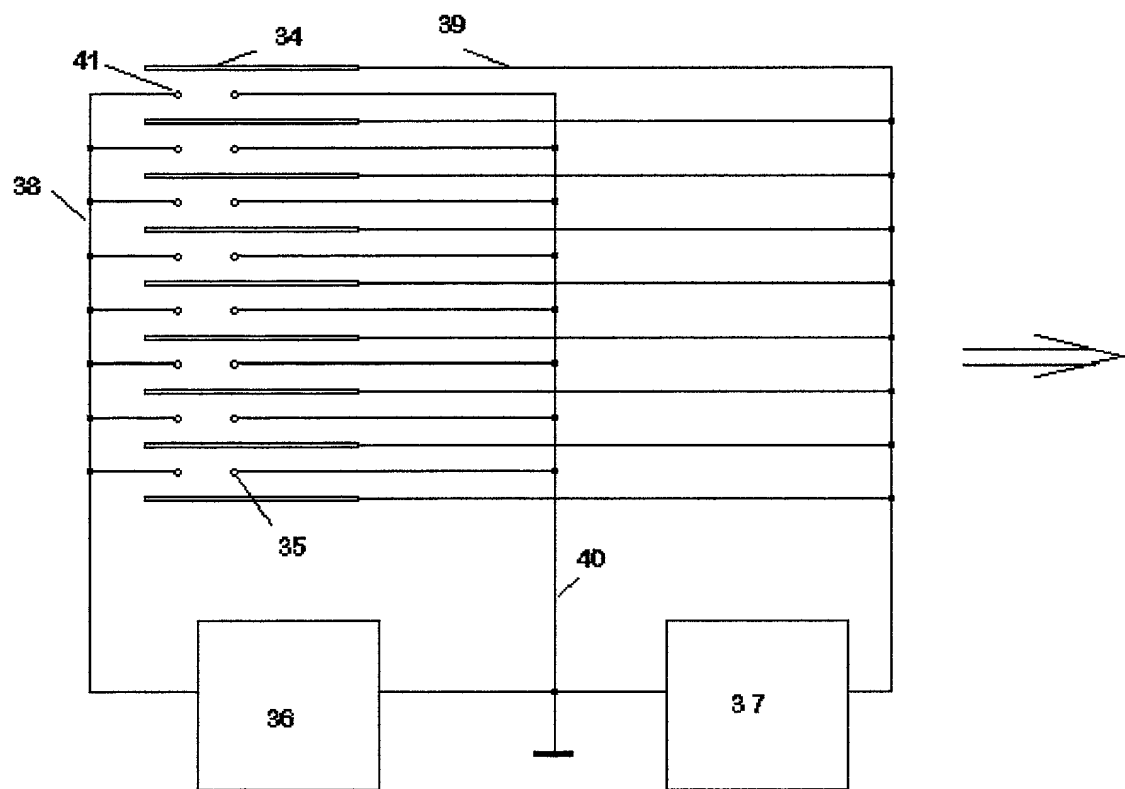


Figure 8

**COMBINED DECLARATION AND POWER OF ATTORNEY**

(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL, DIVISIONAL,  
CONTINUATION OR C-I-P)

As a below-named inventor, I hereby declare that:

**TYPE OF DECLARATION**

This declaration is of the following type:     original declaration

**INVENTORSHIP IDENTIFICATION**

My residence, post office address, and citizenship are as stated below next to my name. I believe I am an original, first, and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**TITLE OF INVENTION**

Electrostatic Fluid Accelerator

**SPECIFICATION IDENTIFICATION**

the specification of which is attached hereto.

**ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR**

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 Code of Federal Regulations § 1.56.

**PRIORITY CLAIM (35 U.S.C. § 119)**

I hereby claim foreign priority benefits under Title 35 United States Code § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the

United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

No such applications have been filed.

**CLAIM FOR BENEFIT OF EARLIER U.S. APPLICATION UNDER  
35 U.S.C. 120**

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, I acknowledge the duty to disclose information that is material to the examination of this application, namely, information where there is substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent, which occurred between the filing date of the prior application(s) and the national filing date of this application.

U. S. provisional application serial no. 60/104,573, filed on 10/16/1998

**POWER OF ATTORNEY**

I hereby appoint the following attorney to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Thompson E. Fehr  
Registration No. 31,353

**SEND CORRESPONDENCE TO:**

Thompson E. Fehr  
Suite 703  
The Aerospace Center  
1104 Country Hills Drive  
Ogden, Utah 84403

**DIRECT TELEPHONE CALL TO:**

Thompson E. Fehr  
(801) 393-6292

**DECLARATION**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States




Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

### SIGNATURES

**Full name of first inventor:** Igor A. Krichtafovitch

**Inventor's signature** \_\_\_\_\_



**Date:** \_\_\_\_\_

10.14.1999

**Country of Citizenship:**

The Ukraine

**Residence:** Bothell, Washington


**Post Office Address:**

822 233rd Street, S. E.  
Bothell, Washington 98021

**Full name of second joint inventor:**

Robert L. Fuhriman, Jr.

**Inventor's signature** \_\_\_\_\_

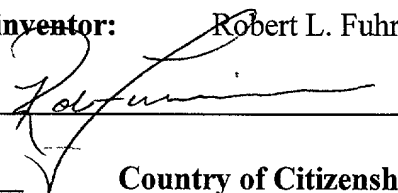

**Date:** \_\_\_\_\_

10-14-99

**Country of Citizenship:**

United States of America

**Residence:** Bellevue, Washington

**Post Office Address:**

13910 S. E. 23rd Street  
Bellevue, Washington 98005

This declaration ends with this page.

09419720-101499